


## Data Sheet

---

### New Construction Box and Sleeve – 1 Gang

---

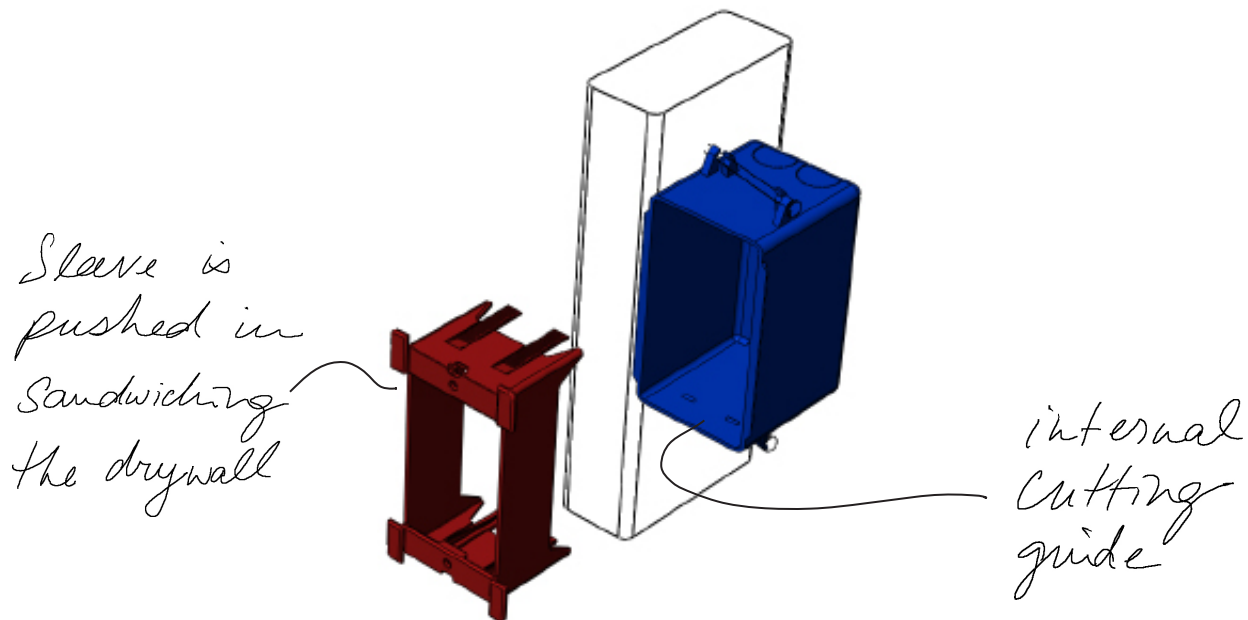

Wall thickness  $\frac{1}{4}$ " -  $1\frac{1}{4}$ "

**Features** Line voltage;  
Box has internal guide for rotary cutting tool;  
Box front mounts flush with stud; and  
Sleeve and box sandwich wall substrate for solid installation.

**Benefits** Less SKUs and inventory - no extension ring required;  
Internal hole cutting guide eliminates tool wander;  
During drywall installation and cutting, the box, mounted flush with the stud, eliminates tension on drywall present with conventional boxes - resulting in the following benefits:

- no final corner damage,
- no need to tighten screws after hole cutting,
- no screw pop if not tightened, and
- no proud screws if not tightened;

No repair required due to the above;

No need to know the wall and cladding thickness during rough in;

No need to add extension ring;and

Sleeve can be adjusted if wall substrate thickness changes.